



- NOTES**
1. THE WORKS SHALL BE IN ACCORDANCE WITH THE FOLLOWING SPECIFICATIONS, NATIONAL BUILDING SPECIFICATION (NBS) AND SEWERS FOR ADOPTION, 7TH EDITION.
 2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ENGINEERING DRAWINGS, ARCHITECTURAL DRAWINGS, MECHANICAL AND ELECTRICAL DRAWINGS AND SPECIFICATIONS.
 3. THE LOCATION, LINE & LEVEL OF ALL KNOWN EXISTING BURIED SERVICE MAINS AND DRAINAGE PREVIOUSLY INDICATED ON THE DRAWINGS ARE APPROXIMATE AND FOR GUIDANCE PURPOSES ONLY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THEIR EXACT LINE & LEVEL BY WAY OF HAND EXCAVATED TRIAL PITS, PRIOR TO THE COMMENCEMENT OF ANY EXCAVATION WORKS ON SITE. THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO MAINTAIN THE STRUCTURAL INTEGRITY OF ALL ABOVE AND BELOW GROUND SERVICE MAINS / DRAINAGE INSTALLATIONS.
 4. THE CONTRACTOR MUST COMPLY WITH ALL CURRENT LEGISLATION RELATING TO HEALTH & SAFETY.
 5. THE MAIN CONTRACTOR IS RESPONSIBLE FOR THE DESIGN OF ALL TEMPORARY WORKS AND IS ALSO RESPONSIBLE FOR THE SAFE MAINTENANCE AND STABILITY OF EXISTING BUILDINGS AT ALL TIMES.
 6. THE MAIN CONTRACTOR IS RESPONSIBLE FOR THE MITIGATION OF ALL OCCURRENCES OF GROUND WATER DURING THE CONSTRUCTION PERIOD.
 7. THE CONTRACTOR SHALL MAKE ALLOWANCE FOR RAISING / LOWERING ALL EXISTING ACCESS COVERS & FRAMES TO SUIT NEW FINISHED LEVELS.
 8. ALL SOFT / HARD PAVED AREAS AFFECTED BY THE WORKS SHALL BE FULLY REINSTATED UPON COMPLETION OF THE WORKS. ALL SURFACE MARKINGS DAMAGED BY THE WORKS SHALL BE FULLY REINSTATED.
 9. ALL SURPLUS EXCAVATED MATERIAL SHALL BE DISPOSED OF OFF SITE.
 10. ALL LEVELS ARE TO ORDNANCE DATUM.

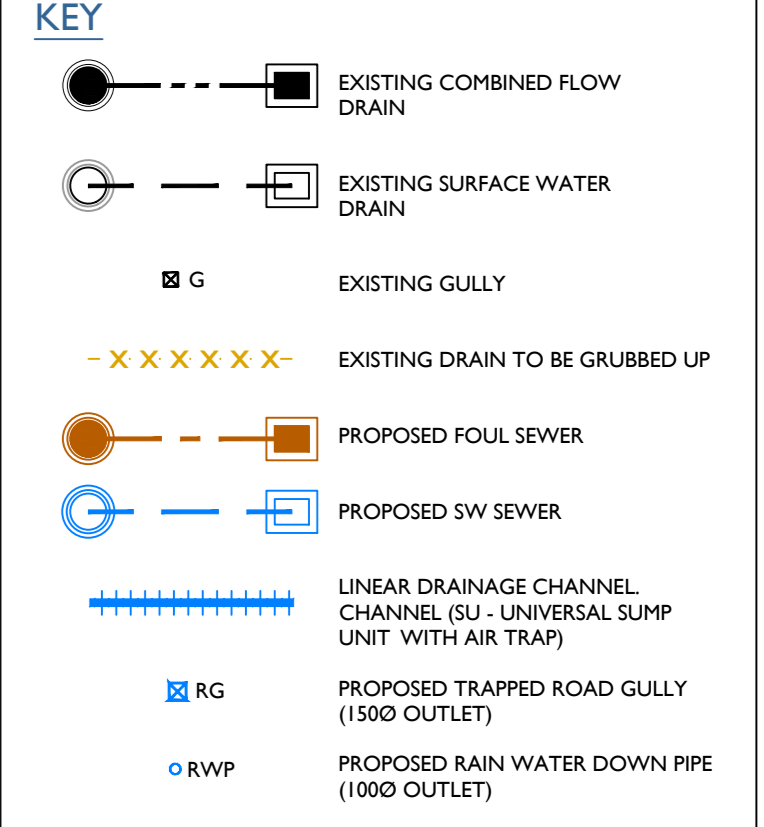

NOTE
THE EXISTING DRAINAGE AND CONNECTIONS AS SHOWN ARE BASED ON CCTV SURVEY UNDERTAKEN BY METROGOD (30.03.23) AND OTHER SOURCES AND WILL THEREFORE NEED TO BE VERIFIED ON SITE.

NOTE
THE DRAINAGE ASSOCIATED WITH EXISTING MANHOLES 4-8 WAS FOUND TO BE FULL OF WATER BY THE CCTV SURVEY UNDERTAKEN BY METROGOD (30.03.23). IT IS RECOMMENDED THAT THE CAUSE OF THIS IS DETERMINED, AND REMEDIAL WORKS UNDERTAKEN TO ENSURE THE PERFORMANCE OF THIS DRAINAGE NETWORK.

NOTE
AT THIS STAGE DETAILS OF THE EXISTING PETROL INTERCEPTOR AND TREATMENT TANK ARE YET TO BE ESTABLISHED. IT IS ASSUMED THESE ARE SUITABLY SIZED AND IN WORKING ORDER TO TREAT THE RUNOFF FROM THEIR RESPECTIVE AREAS. DETAILS OF THESE WILL NEED TO BE PROVIDED TO CONFIRM THAT THEY HAVE BEEN SUITABLY SIZED AND IN WORKING ORDER.



REV	DESCRIPTION	BY	CHK	APP	DATE



PURPOSE OF ISSUE	PRELIMINARY	STATUS	P
PROJECT	GOFER WASTE TRANSFER SITE		
TITLE	DRAINAGE SCHEME PROPOSED LAYOUT		
CLIENT	CONWY COUNTY BOROUGH COUNCIL		
DRAWN BY	JR	CHECKED BY	RH
DATE	09.05.2023	APPROVED BY	JP
DRAWING NUMBER	GWS-JPS-XX-XX-DR-C-0502	SCALE (@ A0)	1:200
PROJECT NUMBER	16020	PROJECT NUMBER	16020
REV	PO1	REV	PO1